


The Drawing and its contents are to be kept secret from third parties, particularly competitors. The drawing and documents which go with it are not to be duplicated either in local or extract, or used in other documentation without express approval (§15 and §18 UrHG - §1 and §18 UWG). A reservation of rights in accordance with §12 PatG is declared for the event that a patent is granted.

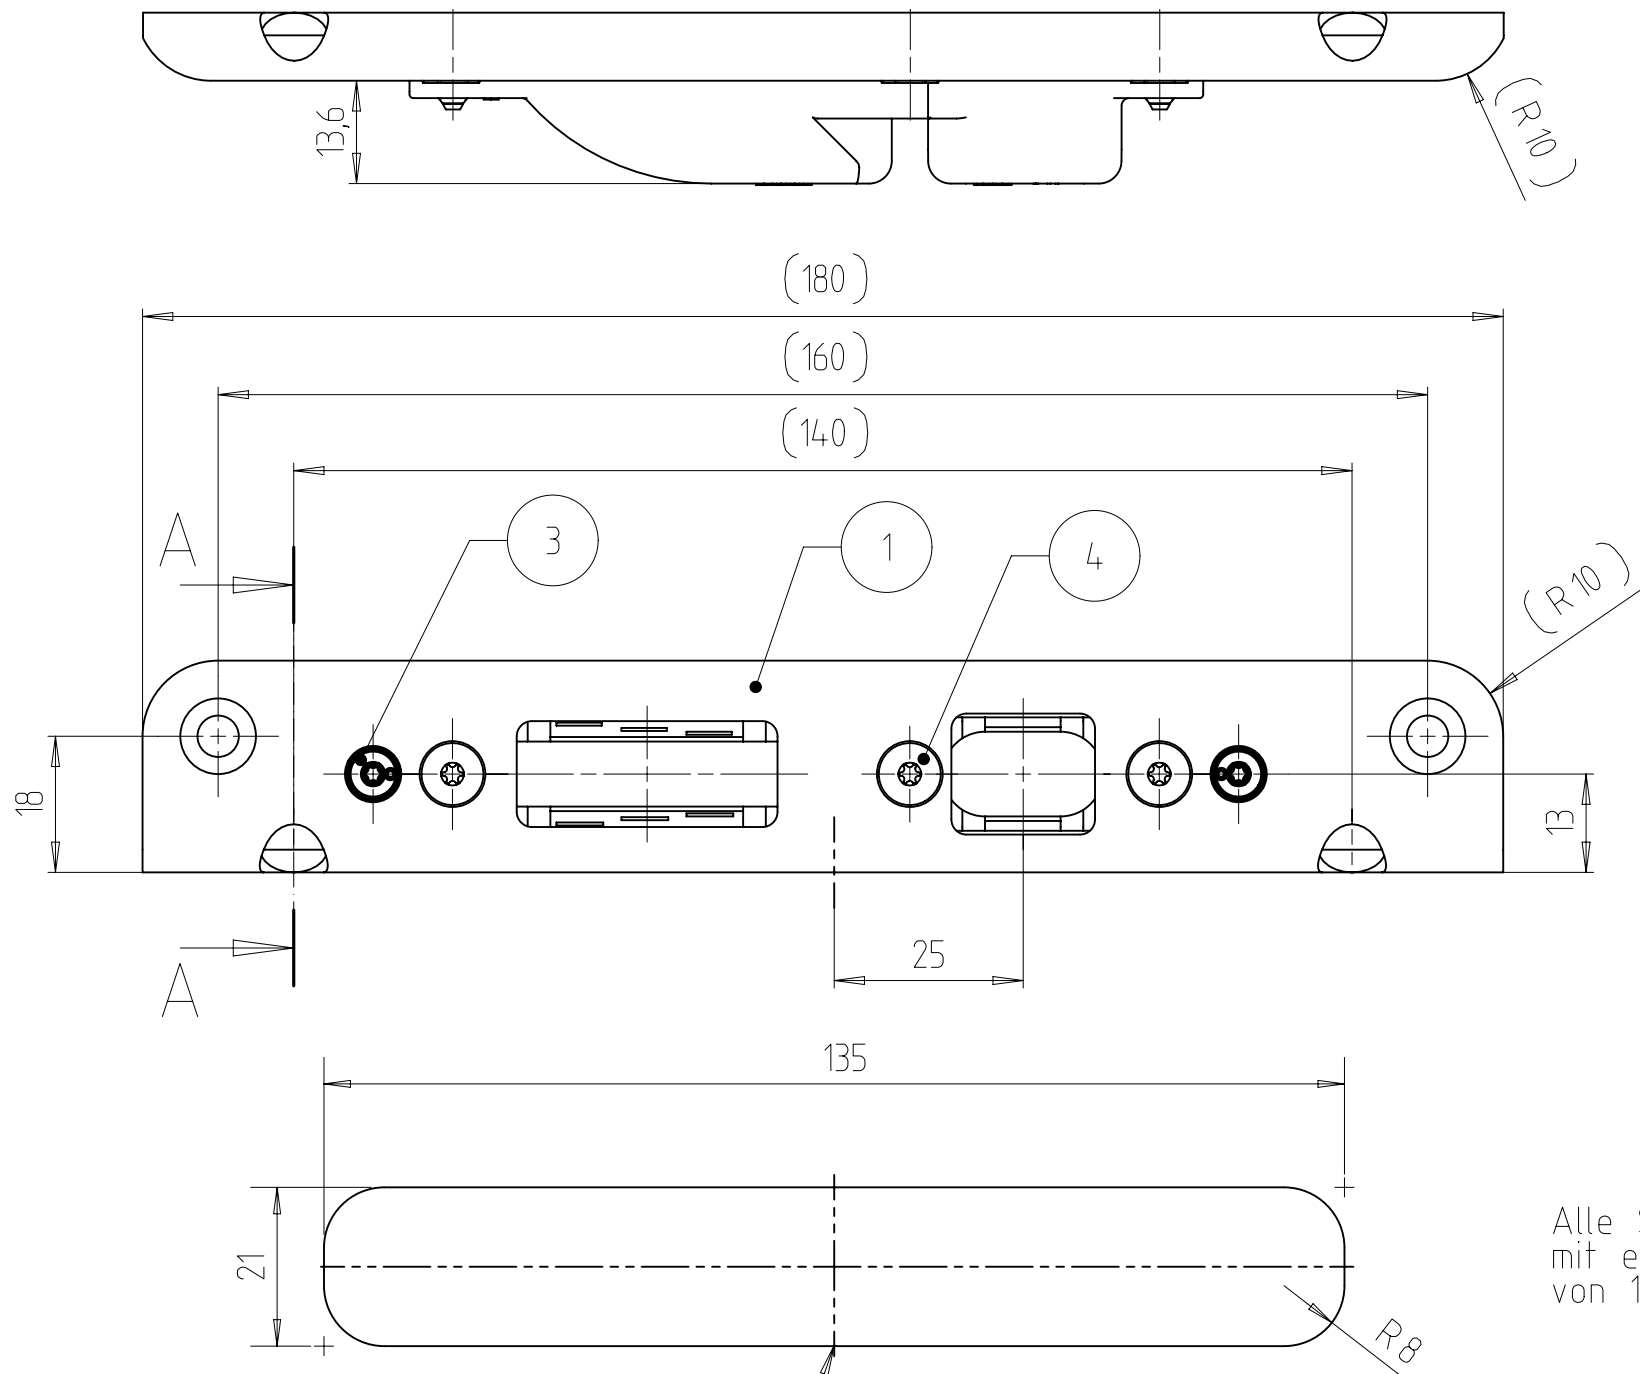

Mitte
Zusatzschloss

Frästiefe = angegebene Tiefe + min. 1 mm

Fräser \varnothing 16 mm
Anlaufring \varnothing 27 mm

wie gezeichnet DIN links
spiegelbildlich DIN rechts

Artikel- Nr. auf der Rückseite geprägt

Tolerierung nach ISO 8015

Pos. 3 in Pos. 2 einlegen
Pos. 2 und Pos. 1 mit Pos. 4 verschrauben

Alle Schraubverbindungen sind
mit einem Anzugsdrehmoment
von $1,6 \pm 0,2$ Nm anzuziehen

Pos	Benennung	Stck	PDM-Nr.	Bemerk
4	Senkschr T10 M4x12	3	9.999.03359	
3	Rd_Excenter	2	9.714.00090	
2	Schliesskasten komplett	1	7.880.00052	
1	Winkel- Schliessblech	1	9.858.00080	

Qty. 1	Type of Modification	Aktualisierung Baugruppe	ANT EK1-2126201	Drawn Ender	Approved Vasilescu	Date 18.07.2023
Volume /mm ³	Weight/g	Material-No.	Item-No.	Tool-No.		
26374	134,011		3617-580-10			
		Tolerance ISO 2768 mK	Part-Description Winkel- Schliessblech			
Scale 1 : 1		Additional Notice				
Drawn Mueller	Date 13.03.2009	KFV	Document No. 7.858.00086	Doc. Part No. 000	Revision 04	Status 20
Apr.	Date		Replacement for :	Test procedure		Size A3
			Replaced by :			